

P-A2FO

Fixed Axial Piston Pump



www.yeoshehydraulic.com

Efficient Performance
Innovative Technology
Reliable Quality and Service

YEOSHE HYDRAULICS CO.,LTD.



Ordering code for standard program



- Series 6
- Size 5 、 10 to 200
- Nominal pressure : 315 、 400 bar
- Maximum pressure : 350 、 450 bar
- Open circuit

Features

1. Fixed pump with axial tapered piston rotary group of bent-axis design, for hydrostatic drives in an open circuit.
2. For use in mobile and stationary applications.
3. The flow is proportional to the drive speed and displacement.
4. The drive shaft bearings are designed for the bearing service life requirements usually encountered in these areas.
5. High power density
6. Small dimensions
7. High total efficiency
8. Economical design
9. One-piece tapered piston with piston rings for sealing.

	A2F		O	107	/	6	0	R	-	V	A	B	100	
1	2	3	4	5		6	7	8		9	10	11	12	13

Hydraulic fluid

1	Mineral oil.	
	HFB, HFC hydraulic fluid	Sizes 5 to 200 (without code)

Axial piston unit

2	Bent-axis design, fixed	A2F
---	-------------------------	-----

Drive shaft bearing

		5 to 200	
3	Standard bearing (without code)	■	
	Long-life bearing	-	L

Operating mode

4	Pump, open circuit	O
---	--------------------	---

Size (NG)

5	Geometric displacement, see table of values on page 7																	
		5	10	12	16	23	28	32	45	56	63	80	90	107	125	160	180	200

Series

6		6
---	--	---

■ = Available

□ = On request

- = Not available

■ = Preferred program

Ordering code for standard program

O

2

P-A2FO series

	A2F		O	107	/	6	0	R	-	V	A	B	100	
1	2	3	4	5		6	7	8		9	10	11	12	13

Index

7	NG10 to 180												1
	NG200												3
	NG5												0

Direction of rotation

8	Viewed on drive shaft	clockwise		R
		counter-clockwise		L

Seals

9	FKM (fluor-caoutchouc)	V
---	------------------------	---

Drive shafts

		5	10	12	16	23	28	32	45	56	63	80	90	107	125	160	180	200	
10	Splined shaft DIN 5480	-	■	■	■	■	■	■	-	■	■	■	■	■	■	■	■	■	A
		-	■	■	-	■	■	-	■	■	-	■	-	■	-	■	-	-	Z
	Parallel keyed shaft DIN 6885	■	■	■	■	■	■	■	-	■	■	■	■	■	■	■	■	■	B
		-	■	■	-	■	■	-	■	■	-	■	-	■	-	■	-	-	P
	Conical shaft ¹⁾	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	C

Mounting flanges

			5 to 200	
11	ISO 3019-2	4-hole	■	B
		8-hole	-	H

Port plates for service lines ²⁾

		5	10 to 16	23 to 200	
12	SAE flange port A/B at side and SAE flange port S at rear	-	-	■	05
	Threaded port A/B at side and threaded port S at rear	-	■	-	06
	SAE flange ports A/B and S at rear	-	-	-	11
	Threaded ports A/B and S at side	■	-	-	07

Standard / special version

13	Standard version (without code)	
	Standard version with installation variants, e. g. T ports against standard open or closed	-Y
	Special version	-S

■ = Available

□ = On request

- = Not available

■ = Preferred program

1) Conical shaft with threaded pin and woodruff key (DIN 6888). The torque must be transmitted via the tapered press fit.

2) Fastening thread or threaded ports, metric




Technical data

Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil), RE 90221 (environmentally acceptable hydraulic fluids), RE 90222 (HFD hydraulic fluids) and RE 90223 (HFA, HFB, HFC hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

The fixed pump A2FO is not suitable for operation with HFA hydraulic fluid. If HFB, HFC or HFD or environmentally acceptable hydraulic fluids are used, the limitations regarding technical data or other seals must be observed.

Selection diagram

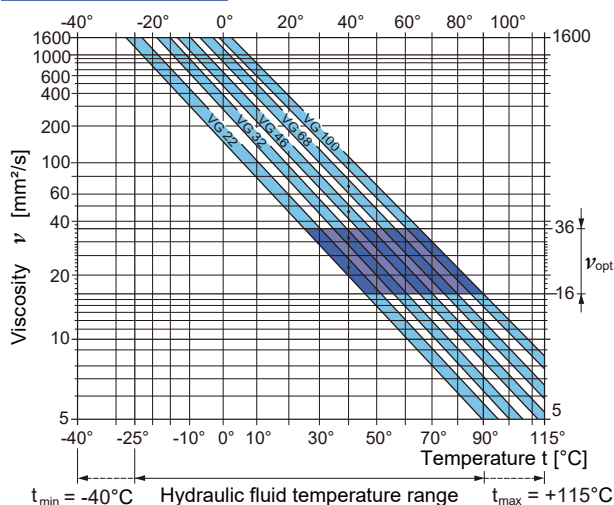

Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in an open circuit, the reservoir temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range (ν_{opt} see shaded area of the selection diagram). We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of X °C, an operating temperature of 60 °C is set in the circuit. In the optimum operating viscosity range (ν_{opt} , shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

Note

The case drain temperature, which is affected by pressure and speed, can be higher than the reservoir temperature. At no point of the component may the temperature be higher than 115 °C. The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

Viscosity and temperature of hydraulic fluid

	Viscosity [mm²/s]	Temperature	Comment
Transport and storage at ambient temperature		$T_{min} \geq -50^{\circ}\text{C}$ $T_{opt} = +5^{\circ}\text{C}$ to $+20^{\circ}\text{C}$	factory preservation: up to 12 months with standard, up to 24 months with long-term
(Cold) start-up ¹⁾	$\nu_{max} = 1600$	$T_{St} \geq -40^{\circ}\text{C}$	$t \leq 3$ min, without load ($p \leq 50$ bar), $n \leq 1000$ rpm (for sizes 5 to 200)
Permissible temperature difference		$\Delta T \leq 25$ K	between axial piston unit and hydraulic fluid
Warm-up phase	$\nu < 1600$ to 400	$T = -40^{\circ}\text{C}$ to -25°C	at $p \leq 0.7 \cdot p_{nom}$, $n \leq 0.5 \cdot n_{nom}$ and $t \leq 15$ min
Operating phase			
Temperature difference		$\Delta T = \text{approx. } 12$ K	between hydraulic fluid in the bearing and at port T.
Maximum temperature		115°C 103°C	in the bearing measured at port T
Continuous operation	$\nu = 400$ to 10 $\nu_{opt} = 36$ to 16	$T = -25^{\circ}\text{C}$ to $+90^{\circ}\text{C}$	measured at port T, no restriction within the permissible data
Short-term operation	$\nu_{min} \geq 7$	$T_{max} = +103^{\circ}\text{C}$	measured at port T, $t < 3$ min, $p < 0.3 \cdot p_{nom}$
FKM shaft seal ¹⁾		$T \leq +115^{\circ}\text{C}$	see page 5

¹⁾ At temperatures below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).

Technical data

O

4

P-A2FO series

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric analysis of the hydraulic fluid is necessary to determine the amount of solid contaminant and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

At very high hydraulic fluid temperatures (90°C to maximum 115°C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

If the above classes cannot be achieved, please contact us.

Shaft seal


Permissible pressure loading

The service life of the shaft seal is influenced by the speed of the axial piston unit and the case drain pressure (case pressure). The mean differential pressure of 2 bar between the case and the ambient pressure may not be enduringly exceeded at normal operating temperature. For a higher differential pressure at reduced speed, see diagram. Momentary pressure spikes ($t < 0.1$ s) of up to 10 bar are permitted.

The service life of the shaft seal decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or higher than the ambient pressure.

Sizes 10 to 200

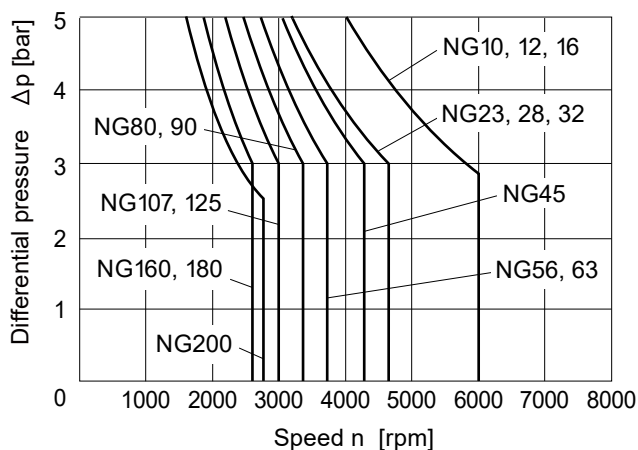

Temperature range

The FKM shaft seal may be used for case drain temperatures from -25 °C to +115 °C.

Note

For application cases below -25°C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C). State NBR shaft seal in plain text when ordering. Please contact us.

Direction of flow

Direction of rotation, viewed on drive shaft	
clockwise	counter-clockwise
S to B	S to A



Technical data

Operating pressure range

(operating with mineral oil)

Pressure at service line port A or B

Size 5

Nominal pressure p_{nom} _____ 315 bar absolute

Maximum pressure p_{max} _____ 350 bar absolute

Single operating period _____ 10 s

Total operating period _____ 300 h

Sizes 10 to 200

Nominal pressure p_{nom} _____ 400 bar absolute

Maximum pressure p_{max} _____ 450 bar absolute


Single operating period _____ 10 s

Total operating period _____ 300 h

Minimum pressure (high-pressure side) _____ 25 bar absolute

Rate of pressure change $R_{A\ max}$

Without pressure-relief valve _____ 16000 bar/s

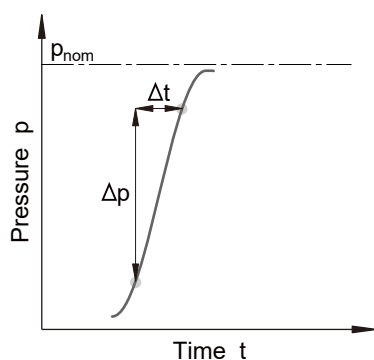

Pressure at suction port S (inlet)

Minimum pressure $p_{S\ min}$ _____ 0.8 bar absolute

Maximum pressure $p_{S\ max}$ _____ 30 bar absolute

Note

Values for other hydraulic fluids, please contact us.

Definition

Nominal pressure p_{nom}

The nominal pressure corresponds to the maximum design pressure.

Maximum pressure p_{max}

The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.

Minimum pressure (high-pressure side)


Minimum pressure at the high-pressure side (A or B) which is required in order to prevent damage to the axial piston unit.

Minimum pressure (inlet)

Minimum pressure at suction port S (inlet) which is required in order to prevent damage to the axial piston unit. The minimum pressure is dependent on the speed of the axial piston unit (seediagram on page 7).

Rate of pressure change R_A

Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.

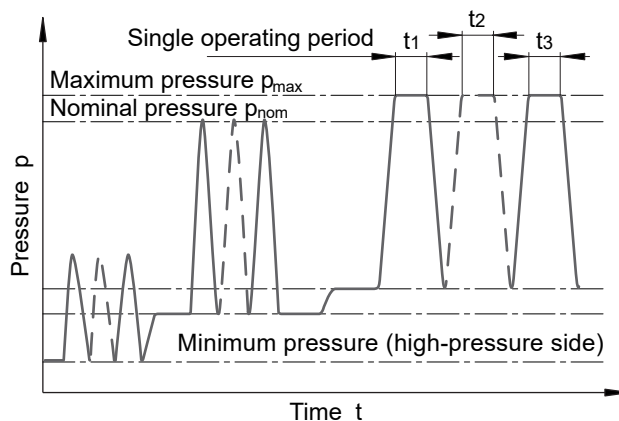

Total operating period = $t_1 + t_2 + \dots + t_n$

Technical data

Table of values (theoretical values, without efficiency and tolerances; values rounded)


Size	NG	5	10	12	16	23	28	32	45	56	63	80
Displacement geometric, per revolution	V_g cm^3	4.93	10.3	12	16	22.9	28.1	32	45.6	56.1	63	80.4
Speed maximum ¹⁾	n_{nom} rpm	5600	3150	3150	3150	2500	2500	2500	2240	2000	2000	1800
	n_{max} ²⁾ rpm	8000	6000	6000	6000	4750	4750	4750	4250	3750	3750	3350
Flow at n_{nom}	q_v L/min	27.6	32	38	50	57	70	80	102	112	126	145
Power at	$\Delta p = 350$ bar P kW	14.5 ⁴⁾	19	22	29	33	41	47	60	65	74	84
	$\Delta p = 400$ bar P kW	–	22	25	34	38	47	53	68	75	84	96
Torque ³⁾ at V_g and	$\Delta p = 350$ bar T Nm	24.7 ⁴⁾	57	67	89	128	157	178	254	313	351	448
	$\Delta p = 400$ bar T Nm	–	66	76	102	146	179	204	290	357	401	512
Rotary stiffness	c kNm/rad	0.63	0.92	1.25	1.59	2.56	2.93	3.12	4.18	5.94	6.25	8.73
Moment of inertia for rotary group	J_{GR} kgm ²	0.00006	0.0004	0.0004	0.0004	0.0012	0.0012	0.0012	0.0024	0.0042	0.0042	0.0072
Maximum angular acceleration	α rad/s ²	5000	5000	5000	5000	6500	6500	6500	14600	7500	7500	6000
Case volume	V L		0.17	0.17	0.17	0.20	0.20	0.20	0.33	0.45	0.45	0.55
Mass (approx.)	m kg	2.5	6	6	6	9.5	9.5	9.5	13.5	18	18	23

Size	NG	90	107	125	160	180	200
Displacement geometric, per revolution	V_g cm^3	90	106.7	125	160.4	180	200
Speed maximum ¹⁾	n_{nom} rpm	1800	1600	1600	1450	14500	1550
	n_{max} ²⁾ rpm	3350	3000	3000	2650	2650	2750
Flow at n_{nom}	q_v L/min	162	171	200	233	261	310
Power at	$\Delta p = 350$ bar P kW	95	100	117	136	152	181
	$\Delta p = 400$ bar P kW	108	114	133	155	174	207
Torque ³⁾ at V_g and	$\Delta p = 350$ bar T Nm	501	594	696	893	1003	1114
	$\Delta p = 400$ bar T Nm	573	679	796	1021	1146	1273
Rotary stiffness	c kNm/rad	9.14	11.2	11.9	17.4	18.2	57.3
Moment of inertia for rotary group	J_{GR} kgm ²	0.0072	0.0116	0.0116	0.0220	0.0220	0.0353
Maximum angular acceleration	α rad/s ²	6000	4500	4500	3500	3500	11000
Case volume	V L	0.55	0.8	0.8	1.1	1.1	2.7
Mass (approx.)	m kg	23	32	32	45	45	66

- 1) The values are valid:
- at an absolute pressure $p_{\text{abs}} = 1$ bar at suction port S
 - for the optimum viscosity range from $\nu_{\text{opt}} = 16$ to $36 \text{ mm}^2/\text{s}$
 - with hydraulic fluid based on mineral oils
- 2) Maximum speed (limiting speed) with increased inlet pressure p_{abs} at suction port S, see adjacent diagram.
- 3) Torque without radial force, with radial force see page 8
- 4) Torque at $\Delta p = 315$ bar

Note

Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, with respect to speed variation, reduced angular acceleration as a function of the frequency and the permissible start up angular acceleration (lower than the maximum angular acceleration) can be found in data sheet RE 90261.

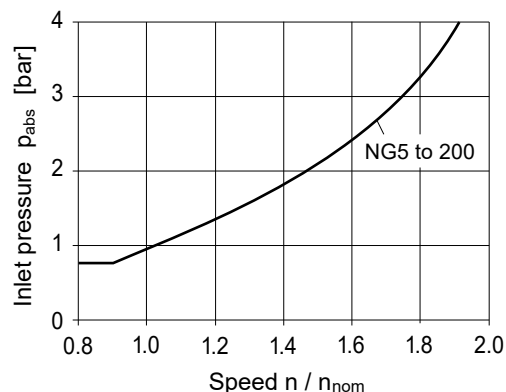



Technical data


O


7

P-A2FO series

Permissible radial and axial forces of the drive shafts

(splined shaft and parallel keyed shaft)

Size	NG		5	5 ³⁾	10	10	12	12	16	23	23	
Drive shaft	∅	mm	12	12	20	25	20	25	25	25	30	
Maximum radial force ¹⁾ at distance a (from shaft collar)		F _{q max}	kN	1.6	1.6	3.0	3.2	3.0	3.2	3.2	5.7	5.4
		a	mm	12	12	16	16	16	16	16	16	16
with permissible torque	T _{max}	Nm	24.7	24.7	66	66	76	76	102	146	146	
△ permissible pressure Δp	Δp _{perm}	bar	315	315	400	400	400	400	400	400	400	
Maximum axial force ²⁾ 	+F _{ax max}	N	180	180	320	320	320	320	320	500	500	
	-F _{ax max}	N	0	0	0	0	0	0	0	0	0	
Permissible axial force per bar operating pressure	±F _{ax perm/bar}	N/bar	1.5	1.5	3.0	3.0	3.0	3.0	3.0	5.2	5.2	

Size	NG		28	28	32	45	56	56 ⁴⁾	56	63	80	
Drive shaft	∅	mm	25	30	30	30	30	30	35	35	35	
Maximum radial force ¹⁾ at distance a (from shaft collar)		F _{q max}	kN	5.7	5.4	5.4	7.6	9.5	7.8	9.1	9.1	11.6
		a	mm	16	16	16	18	18	18	18	18	20
with permissible torque	T _{max}	Nm	179	179	204	290	357	294	357	401	512	
△ permissible pressure Δp	Δp _{perm}	bar	400	400	400	400	400	330	400	400	400	
Maximum axial force ²⁾ 	+F _{ax max}	N	500	500	500	630	800	800	800	800	1000	
	-F _{ax max}	N	0	0	0	0	0	0	0	0	0	
Permissible axial force per bar operating pressure	±F _{ax perm/bar}	N/bar	5.2	5.2	5.2	7.0	8.7	8.7	8.7	8.7	10.6	

1) With intermittent operation

2) Maximum permissible axial force during standstill or when the axial piston unit is operating in non-pressurized condition.

3) Conical shaft with threaded pin and woodruff key (DIN 6888)

4) Restricted technical data only for splined shaft

Note

Influence of the direction of the permissible axial force :

+F_{ax max} = Increase in service life of bearings-F_{ax max} = Reduction in service life of bearings (avoid)

Technical data


O


8

P-A2FO series

Permissible radial and axial forces of the drive shafts

(splined shaft and parallel keyed shaft)

Size	NG		80 ⁴⁾	80	90	107	107	125	160	160	180
Drive shaft	∅	mm	35	40	40	40	45	45	45	50	50
Maximum radial force ¹⁾ at distance a (from shaft collar)		$F_{q \max}$	kN	11.1	11.4	11.4	13.6	14.1	14.1	18.1	18.3
		a	mm	20	20	20	20	20	20	25	25
with permissible torque	$T_{\max}$	Nm	488	512	573	679	679	796	1021	1021	1146
△ permissible pressure Δp	Δp_{perm}	bar	380	400	400	400	400	400	400	400	400
Maximum axial force ²⁾ $F_{ax} \pm$ 		$+F_{ax \max}$	N	1000	1000	1000	1250	1250	1250	1600	1600
		$-F_{ax \max}$	N	0	0	0	0	0	0	0	0
Permissible axial force per bar operating pressure	$\pm F_{ax \text{ perm/bar}}$	N/bar	10.6	10.6	10.6	12.9	12.9	12.9	16.7	16.7	16.7

Size	NG		200	
Drive shaft	∅	mm	50	
Maximum radial force ¹⁾ at distance a (from shaft collar)		F _{q max}	kN	20.3
		a	mm	25
		with permissible torque	T _{max}	Nm
△ permissible pressure Δp	Δp _{perm}	bar	400	
Maximum axial force ²⁾ F _{ax ±} 	+F _{ax max}	N	1600	
	-F _{ax max}	N	0	
Permissible axial force per bar operating pressure	±F _{ax perm/bar}	N/bar	16.7	

1) With intermittent operation

2) Maximum permissible axial force during standstill or when the axial piston unit is operating in non-pressurized condition.

3) Conical shaft with threaded pin and woodruff key (DIN 6888)

4) Restricted technical data only for splined shaft

5) Please contact us.

6) When at a standstill or when axial piston unit operating in non-pressurized conditions. Higher forces are permissible when under pressure, please contact us.

Note

Influence of the direction of the permissible axial force :

 $+F_{ax \max}$ = Increase in service life of bearings $-F_{ax \max}$ = Reduction in service life of bearings (avoid)




Technical data

Effect of radial force F_q on the service life of bearings

By selecting a suitable direction of radial force F_q , the load on the bearings, caused by the internal rotary group forces can be reduced, thus optimizing the service life of the bearings. Recommended position of mating gear is dependent on direction of rotation. Examples :

NG	Toothed gear drive	V-belt output
	$\varphi_{opt.}$	$\varphi_{opt.}$
5 to 180	$\pm 70^\circ$	$\pm 45^\circ$
200	$\pm 45^\circ$	$\pm 70^\circ$

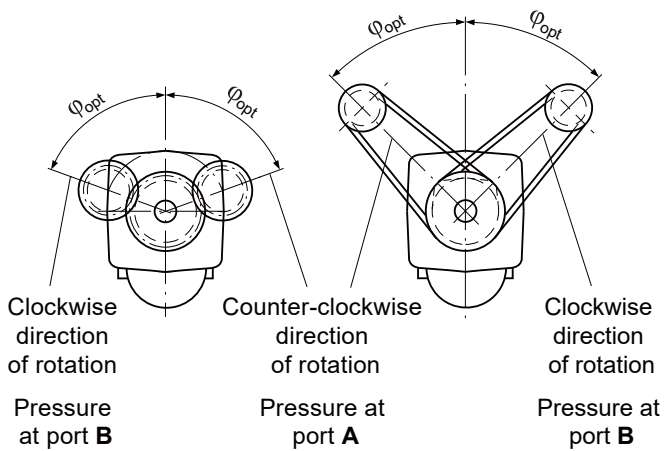

Determining the operating characteristics

Flow $q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$ [L/min]

Torque $T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$ [Nm]

Power $P = \frac{2\pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$ [kW]

V_g = Displacement per revolution in cm^3

Δp = Differential pressure in bar

n = Speed in rpm

η_v = Volumetric efficiency

η_{mh} = Mechanical-hydraulic efficiency


η_t = Total efficiency ($\eta_t = \eta_v \cdot \eta_{mh}$)

Dimensions size 5

Before finalizing your design, request a binding installation drawing. Dimensions in mm.


Port plate 07 – Threaded ports A/B and S at side

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

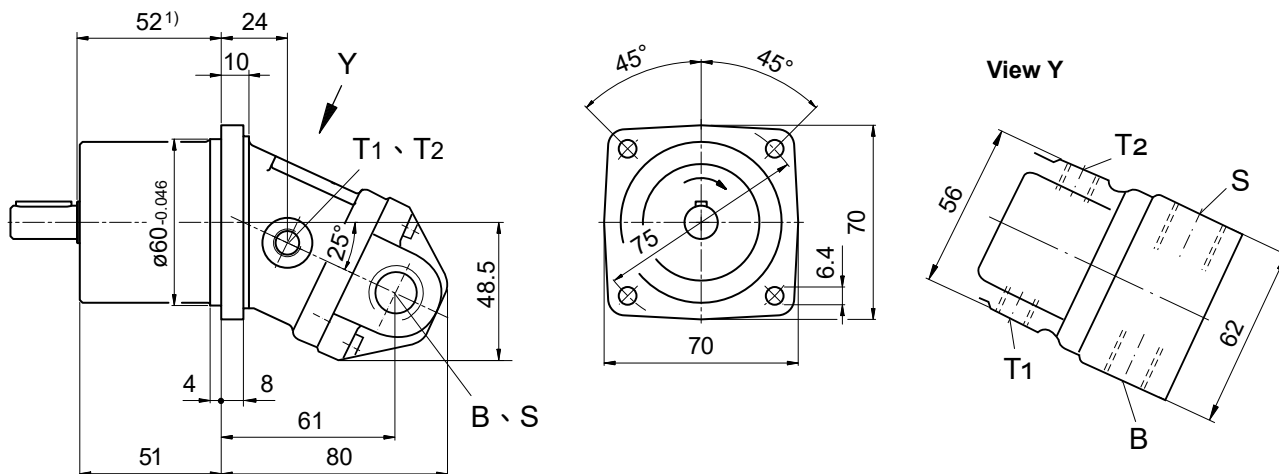


Drive shafts

B Parallel keyed shaft DIN 6885, A4x4x20



C Conical shaft with threaded pin and woodruff key, 3x5 (DIN 6888), (tapering 1:10)

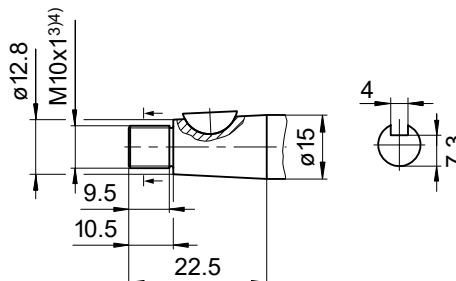

Ports

Designation	Port for	Standard ⁶⁾	Size ³⁾	Maximum pressure [bar] ⁵⁾	State ⁷⁾
B (A)	Service line	DIN 3852	M18 x 1.5 ; 12 deep	350	O
S	Suction line	DIN 3852	M22 x 1.5 ; 14 deep	30	O
T1	Drain line	DIN 3852	M10 x 1 ; 8 deep	3	O
T2	Drain line	DIN 3852	M10 x 1 ; 8 deep	3	O


- 1) To shaft collar
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Observe the general instructions on page 34 for the maximum tightening torques.
- 4) Thread according to DIN 3852, maximum tightening torque: 30 Nm
- 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 6) The spot face can be deeper than specified in the appropriate standard.
- 7) O = Must be connected (plugged on delivery)

Dimensions sizes 10、12、16


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 06 – Threaded port A/B at side and threaded port S at rear


Illustration : cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

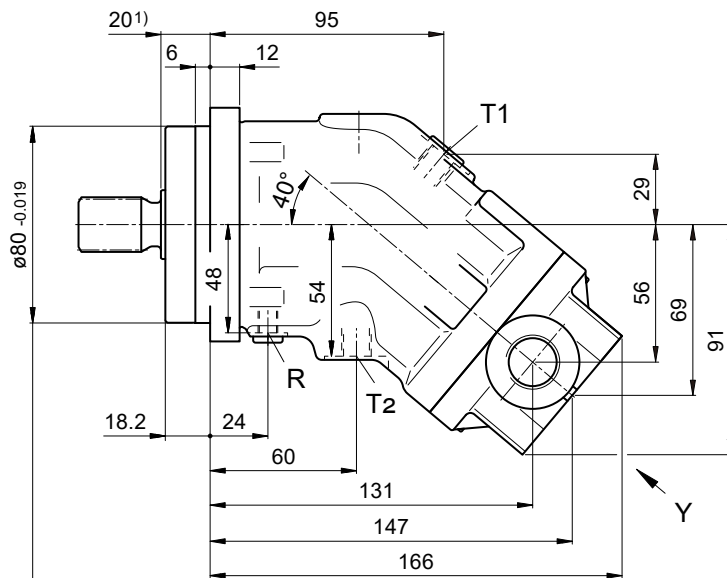

Flange
similar to ISO 3019-2

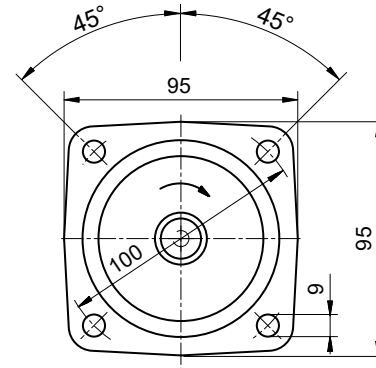

View Y

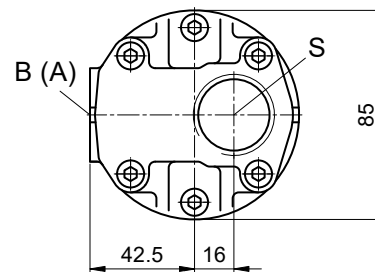

¹⁾ To shaft collar


Dimensions sizes 10、12、16

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts


Sizes 10、12、16

A Splined shaft DIN 5480
W25x1.25x18x9g




NG10、12

Z Splined shaft DIN 5480
W20x1.25x14x9g




Sizes 10、12、16

B Parallel keyed shaft
DIN 6885, AS8x7x32



NG10、12

P Parallel keyed shaft
DIN 6885, AS6x6x32



Ports

Designation	Port for	Standard ⁵⁾	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁶⁾
B (A)	Service line	DIN 3852	M22 x 1.5 ; 14 deep	450	O
S	Suction line	DIN 3852	M33 x 2 ; 18 deep	30	O
T1	Drain line	DIN 3852	M12 x 1.5 ; 12 deep	3	X ⁴⁾
T2	Drain line	DIN 3852	M12 x 1.5 ; 12 deep	3	O ⁴⁾
R	Air bleed	DIN 3852	M8 x 1 ; 8 deep	3	X


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Observe the general instructions on page 34 for the maximum tightening torques.
- 3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 4) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).
- 5) The spot face can be deeper than specified in the appropriate standard.
- 6) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

Dimensions sizes 23、28、32


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear


Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

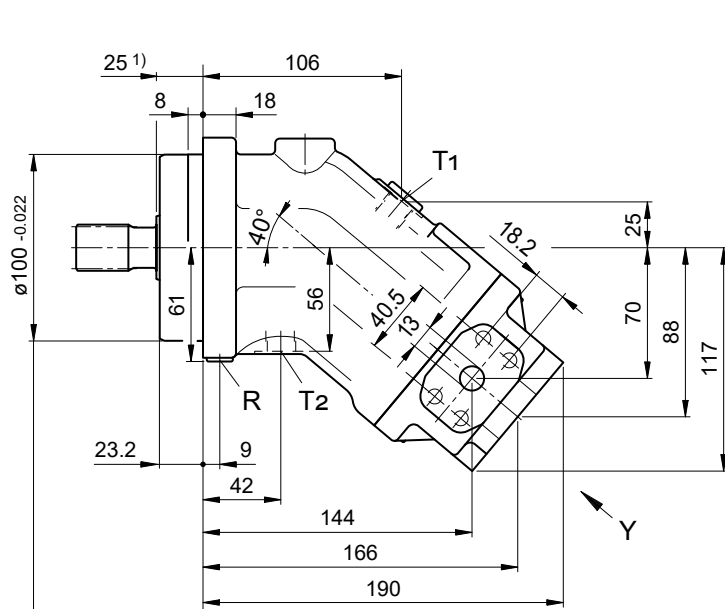

Flange
ISO 3019-2

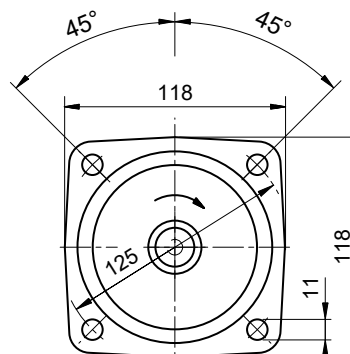

View Y

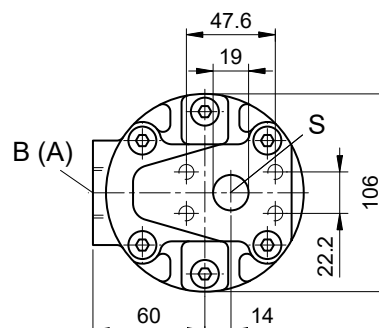

¹⁾ To shaft collar


Dimensions sizes 23、28、32

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts


Sizes 23、28、32

A Splined shaft DIN 5480
W30x2x14x9g




NG23、28

Z Splined shaft DIN 5480
W25x1.25x18x9g




Sizes 23、28、32

B Parallel keyed shaft
DIN 6885, AS8x7x40



NG23、28

P Parallel keyed shaft
DIN 6885, AS8x7x40



Ports

Designation	Port for	Standard	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁷⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁵⁾ DIN 13	1/2 in M8 x 1.25 ; 15 deep	450	O
S	Suction line Fastening thread	SAE J518 ⁵⁾ DIN 13	3/4 in M10 x 1.5 ; 17 deep	30	O
T1	Drain line	DIN 3852 ⁶⁾	M16 x 1.5 ; 12 deep	3	X ⁴⁾
T2	Drain line	DIN 3852 ⁶⁾	M16 x 1.5 ; 12 deep	3	O ⁴⁾
R	Air bleed	DIN 3852 ⁶⁾	M10 x 1 ; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)





Dimensions size 45


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

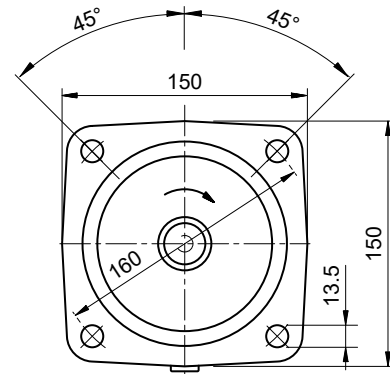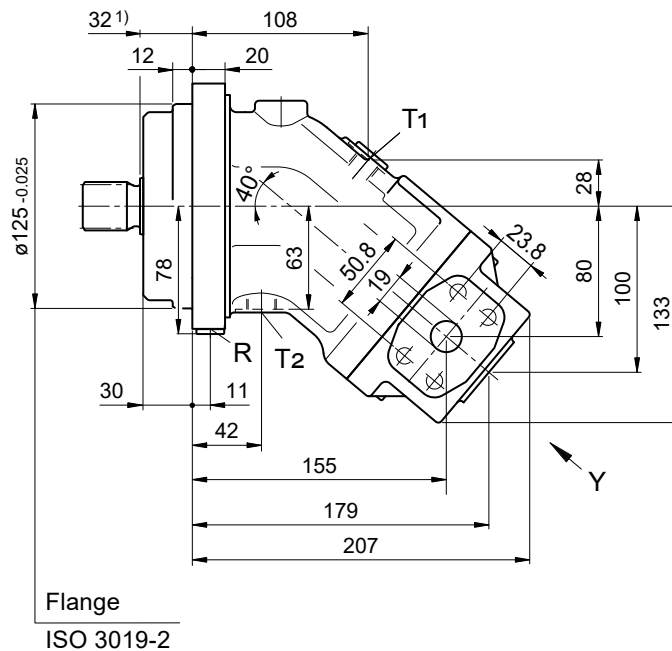

View Y

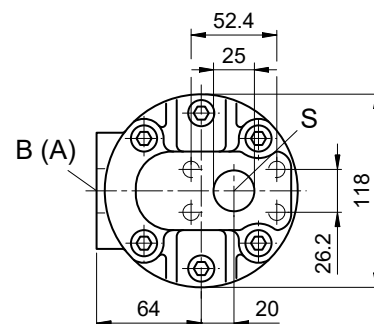


1) To shaft collar

Dimensions size 45


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts

Z Splined shaft DIN 5480 W30x2x14x9g



P Parallel keyed shaft DIN 6885, AS8x7x50



Ports

Designation	Port for	Standard	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁷⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁵⁾ DIN 13	3/4 in M10 x 1.5 ; 17 deep	450	O
S	Suction line Fastening thread	SAE J518 ⁵⁾ DIN 13	1 in M10 x 1.5 ; 17 deep	30	O
T1	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	X ⁴⁾
T2	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	O ⁴⁾
R	Air bleed	DIN 3852 ⁶⁾	M12 x 1.5 ; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)

Dimensions sizes 56 、 63


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear


Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

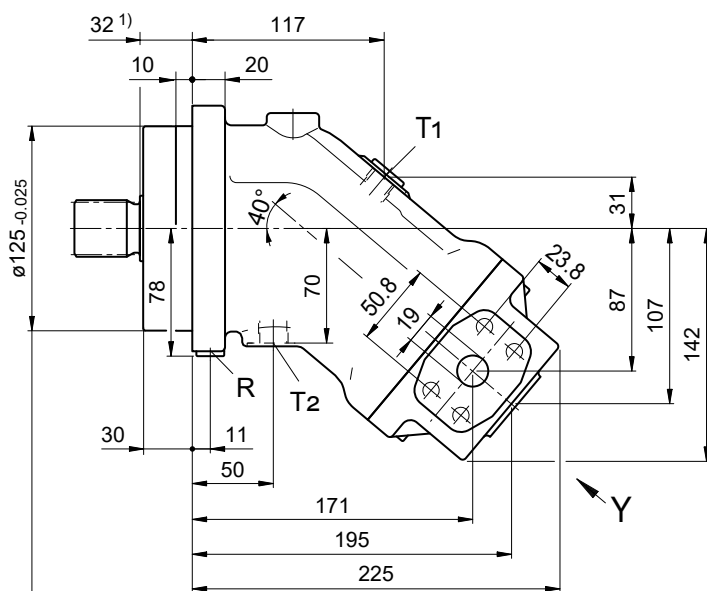

Flange
ISO 3019-2

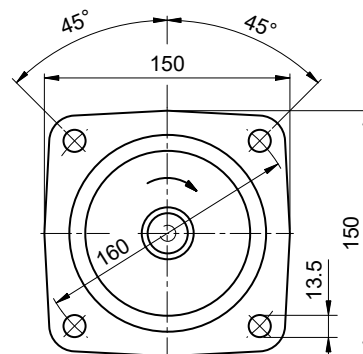

View Y

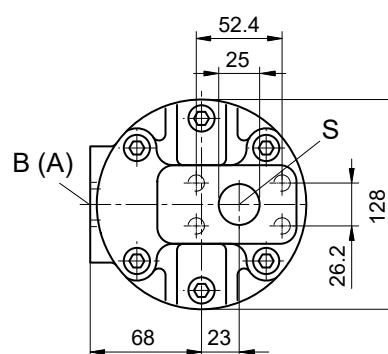

1) To shaft collar


Dimensions sizes 56、63

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts


NG56、63

A Splined shaft DIN 5480
W35x2x16x9g




NG56

Z Splined shaft DIN 5480
W30x2x14x9g




NG56、63

B Parallel keyed shaft
DIN 6885, AS10x8x50



NG56

P Parallel keyed shaft
DIN 6885, AS8x7x50



Ports

Designation	Port for	Standard	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁷⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁵⁾ DIN 13	3/4 in M10 x 1.5 ; 17 deep	450	O
S	Suction line Fastening thread	SAE J518 ⁵⁾ DIN 13	1 in M10 x 1.5 ; 17 deep	30	O
T1	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	X ⁴⁾
T2	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	O ⁴⁾
R	Air bleed	DIN 3852 ⁶⁾	M12 x 1.5 ; 12 deep	3	X



- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Observe the general instructions on page 34 for the maximum tightening torques.
- 3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 4) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.
- 6) The spot face can be deeper than specified in the appropriate standard.
- 7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

Dimensions sizes 80 、 90


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

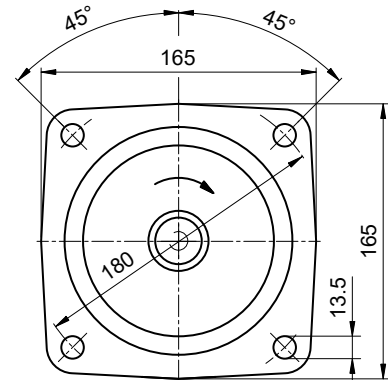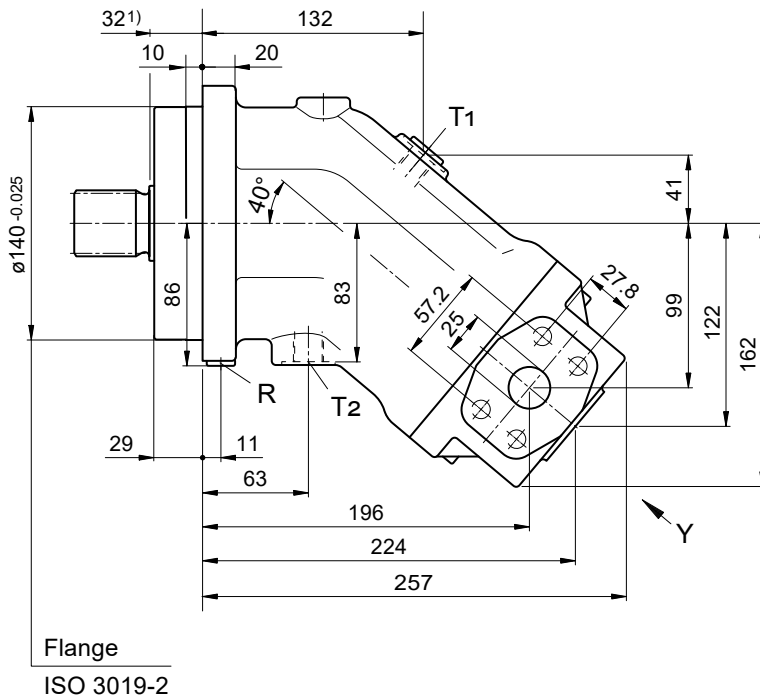

View Y

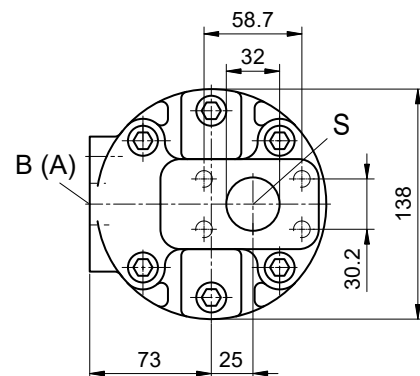

¹⁾ To shaft collar


Dimensions sizes 80、90

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts


NG80、90

A Splined shaft DIN 5480
W40x2x18x9g




NG80

Z Splined shaft DIN 5480
W35x2x16x9g




NG80、90

B Parallel keyed shaft
DIN 6885, AS12x8x56



NG80

P Parallel keyed shaft
DIN 6885, AS10x8x56



Ports

Designation	Port for	Standard	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁷⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁵⁾ DIN 13	1 in M12 x 1.5 ; 17 deep	450	O
S	Suction line Fastening thread	SAE J518 ⁵⁾ DIN 13	1 1/4 in M10 x 1.5 ; 17 deep	30	O
T1	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	X ⁴⁾
T2	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	O ⁴⁾
R	Air bleed	DIN 3852 ⁶⁾	M12 x 1.5 ; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)





Dimensions sizes 107、125

Before finalizing your design, request a binding installation drawing. Dimensions in mm.



Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

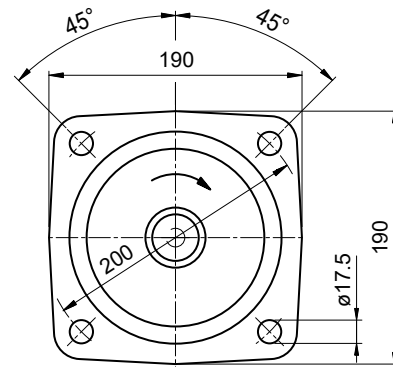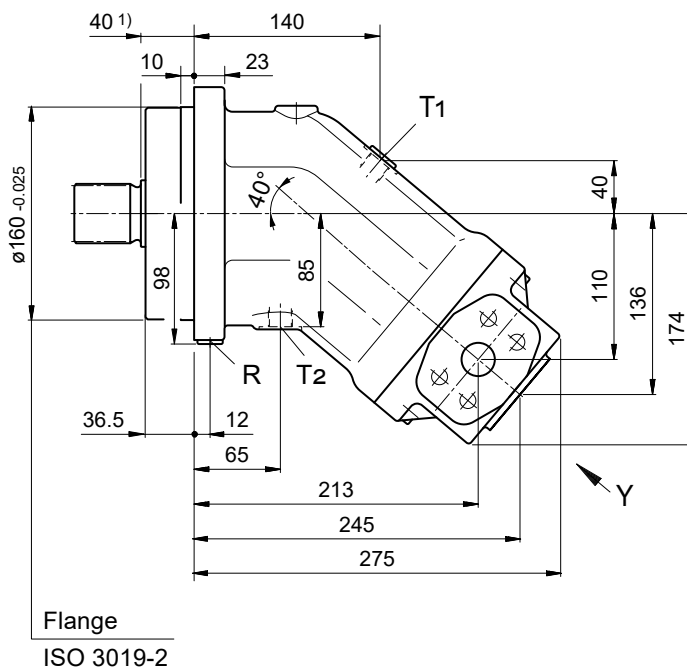

View Y

Detail : port A / B
(dimensions in brackets for size 107)

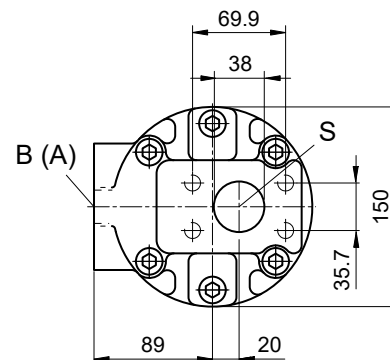


¹⁾ To shaft collar

Dimensions sizes 107、125


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts


NG107、125

A Splined shaft DIN 5480
W45x2x21x9g



NG107

Z Splined shaft DIN 5480
W40x2x18x9g


NG107、125

B Parallel keyed shaft
DIN 6885, AS14x9x63


NG107

P Parallel keyed shaft
DIN 6885, AS12x8x63


Ports

Designation	Port for	Standard	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁷⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁵⁾ DIN 13	1 in (size 107) 1 1/4 in (size 125) M12 x 1.75 ; 17 deep (size 107) M14 x 2 ; 19 deep (size 125)	450	O
S	Suction line Fastening thread	SAE J518 ⁵⁾ DIN 13	1 1/2 in M12 x 1.75 ; 20 deep	30	O
T1	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	X ⁴⁾
T2	Drain line	DIN 3852 ⁶⁾	M18 x 1.5 ; 12 deep	3	O ⁴⁾
R	Air bleed	DIN 3852 ⁶⁾	M14 x 1.5 ; 12 deep	3	X


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Observe the general instructions on page 34 for the maximum tightening torques.
- 3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 4) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.
- 6) The spot face can be deeper than specified in the appropriate standard.
- 7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

Dimensions sizes 160 · 180


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear


Illustration : cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

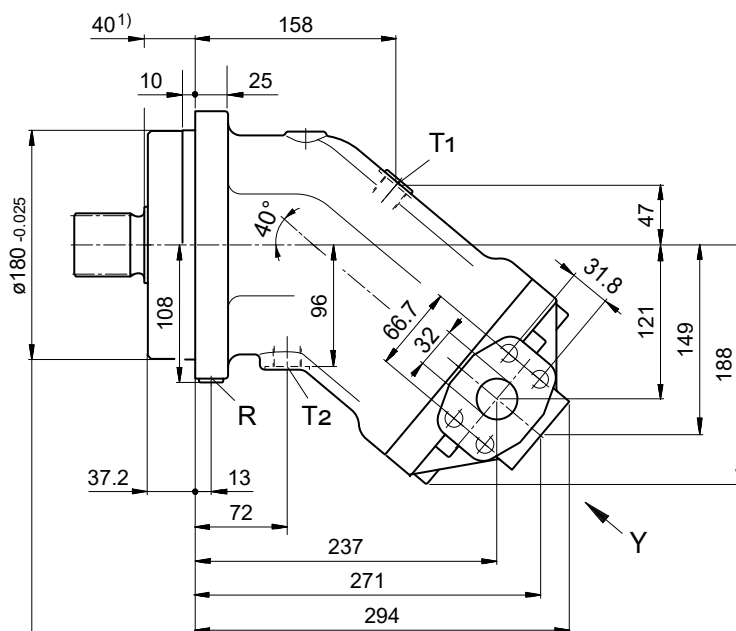

Flange
ISO 3019-2

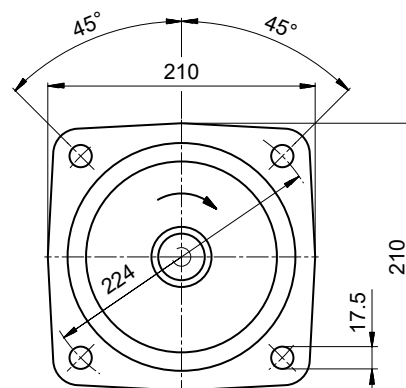

View Y

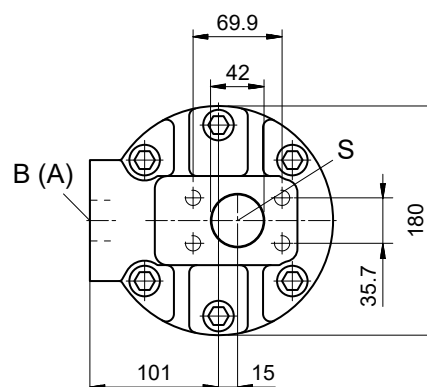

¹⁾ To shaft collar


Dimensions sizes 160 · 180

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Drive shafts


NG160 · 180

A Splined shaft DIN 5480
W50x2x24x9g




NG160

Z Splined shaft DIN 5480
W45x2x21x9g




NG160 · 180

B Parallel keyed shaft
DIN 6885, AS14x9x70



NG160

P Parallel keyed shaft
DIN 6885, AS14x9x70



Ports

Designation	Port for	Standard	Size ²⁾	Maximum pressure [bar] ³⁾	State ⁷⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁵⁾ DIN 13	1 1/4 in M14 x 2 ; 19 deep	450	O
S	Suction line Fastening thread	SAE J518 ⁵⁾ DIN 13	1 1/2 in M12 x 1.75 ; 20 deep	30	O
T1	Drain line	DIN 3852 ⁶⁾	M22 x 1.5 ; 14 deep	3	X ⁴⁾
T2	Drain line	DIN 3852 ⁶⁾	M22 x 1.5 ; 14 deep	3	O ⁴⁾
R	Air bleed	DIN 3852 ⁶⁾	M14 x 1.5 ; 12 deep	3	X

¹⁾ Center bore according to DIN 332 (thread according to DIN 13)

²⁾ Observe the general instructions on page 34 for the maximum tightening torques.

³⁾ Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

⁴⁾ Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).

⁵⁾ Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

⁶⁾ The spot face can be deeper than specified in the appropriate standard.

⁷⁾ O = Must be connected (plugged on delivery)



X = Plugged (in normal operation)



Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear


Illustration : cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

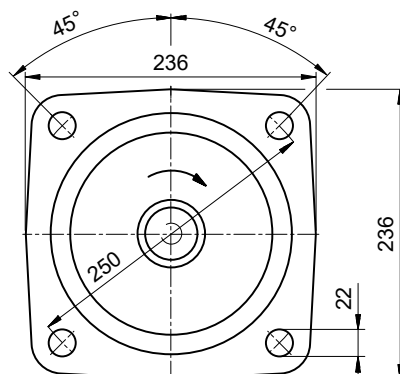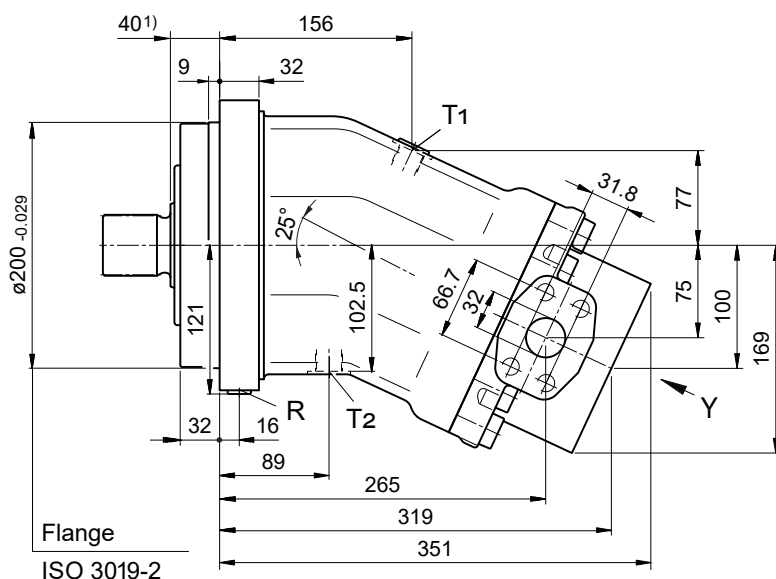



Detail Y

Drive shafts

A Splined shaft DIN 5480
W50x2x24x9g



B Parallel keyed shaft
DIN 6885, AS14x9x80

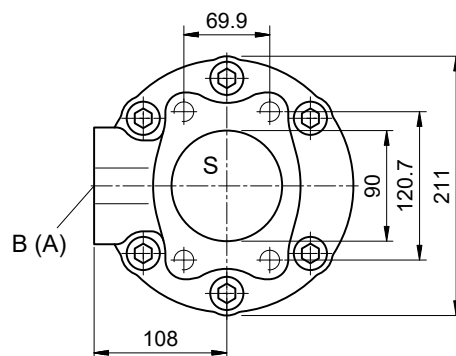

Ports

Designation	Port for	Standard	Size ³⁾	Maximum pressure [bar] ⁴⁾	State ⁸⁾
B (A)	Service line Fastening thread B/A	SAE J518 ⁶⁾ DIN 13	1 1/4 in M14 x 2 ; 19 deep	450	O
S	Suction line Fastening thread	SAE J518 ⁶⁾ DIN 13	3 1/2 in M16 x 2 ; 24 deep	30	O
T1	Drain line	DIN 3852 ⁷⁾	M22 x 1.5 ; 14 deep	3	X ⁵⁾
T2	Drain line	DIN 3852 ⁷⁾	M22 x 1.5 ; 14 deep	3	O ⁵⁾
R	Air bleed	DIN 3852 ⁷⁾	M14 x 1.5 ; 12 deep	3	X

- 1) To shaft collar
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Observe the general instructions on page 34 for the maximum tightening torques.
- 4) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 5) Depending on installation position, T1 or T2 must be connected (see also installation instructions on pages 32 and 33).
- 6) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.
- 7) The spot face can be deeper than specified in the appropriate standard.
- 8) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

Installation instructions

General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

Particularly in the installation position "drive shaft upwards" filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

The case drain fluid in the motor housing must be directed to the reservoir via the highest available drain port (T1 \ T2).

For combinations of multiple units, make sure that the respective case pressure in each unit is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the minimum permissible case pressure of all connected units is not exceeded in any situation. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction and drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height h_s results from the overall loss of pressure ; it must not, however, be higher than $h_{s\max} = 800\text{ mm}$. The minimum suction pressure at port S must also not fall below 0.8 bar absolute during operation and during cold start.

Installation position

See the following examples 1 to 8.


Further installation positions are possible upon request.

Recommended installation positions : 1 and 2.

Below-reservoir installation

(standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

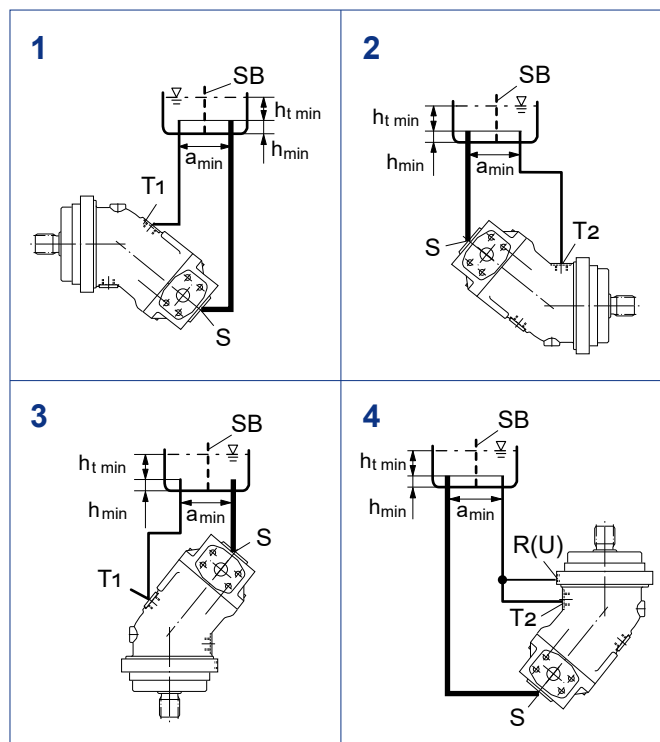


Installation position	Air bleed	Filling
1	–	T1
2	–	T2
3	–	T1
4	R (U)	T2

Installation instructions

Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Recommendation for installation position 8 (drive shaft upward): A check valve in the drain line (cracking pressure 0.5 bar) can prevent draining of the pump housing.

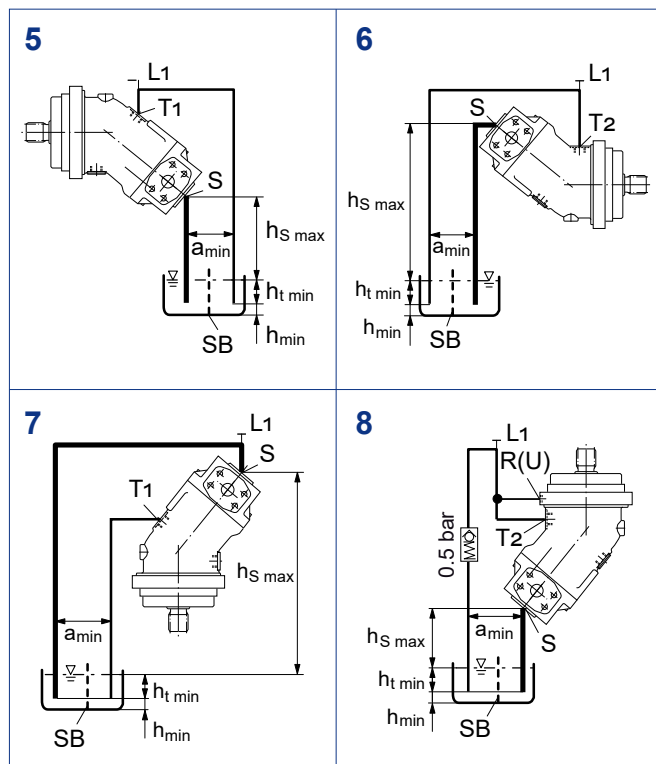

Installation position	Air bleed	Filling
5	L1	T1 (L1)
6	L1	T2 (L1)
7	L1	T1 (L1)
8	R (U)	T2 (L1)

L1 Filling / air bleed

R Air bleed port

U Bearing flushing / air bleed port

S Suction port

T1 \ T2 Drain port

h_{t min} Minimum required immersion depth (200 mm)

h_{min} Minimum required spacing to reservoir bottom (100 mm)

SB Baffle (baffle plate)

h_{S max} Maximum permissible suction height (800 mm)

a_{min} When designing the reservoir, ensure adequate space between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

General instructions

O
28

P-A2FO series

- The pump A2FO is designed to be used in open circuits.
- The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from YEOSHE.
- During and shortly after operation, there is a risk of burns on the axial piston unit. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Service line ports
 - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
 - The service line ports and function ports can only be used to accommodate hydraulic lines.
- The data and notes contained herein must be adhered to.
- The product is not approved as a component for the safety concept of a general machine according to ISO 13849.
- A pressure-relief valve is to be fitted in the hydraulic system.
- The following tightening torques apply :
 - Fittings :
Observe the manufacturer's instructions regarding tightening torques of the fittings used.
 - Mounting bolts :
For mounting bolts with metric ISO thread according to DIN 13 or with thread according to ASME B1.1, we recommend checking the tightening torque in individual cases in accordance with VDI 2230.
 - Female threads in the axial piston unit :
The maximum permissible tightening torques $M_{G\ max}$ are maximum values for the female threads and must not be exceeded. For values, see the following table.
 - Threaded plugs
For the metallic threaded plugs supplied with the axial piston unit, the required tightening torques of threaded plugs M_V apply. For values, see the following table.

Ports		Maximum permissible tightening torque of the female threads $M_{G\ max}$	Required tightening torque of the threaded plugs M_V ¹⁾	WAF hexagon socket in the threaded plugs
Standard	Size of thread			
DIN 3852	M8 x 1	10 Nm	7 Nm	3 mm
	M10 x 1	30 Nm	15 Nm ²⁾	5 mm
	M12x1.5	50 Nm	25 Nm ²⁾	6 mm
	M14 x 1.5	80 Nm	35 Nm	6 mm
	M16 x 1.5	100 Nm	50 Nm	8 mm
	M18 x 1.5	140 Nm	60 Nm	8 mm
	M22 x 1.5	210 Nm	80 Nm	10 mm
	M33 x 2	540 Nm	225 Nm	17 mm
	M42 x 2	720 Nm	360 Nm	22 mm

¹⁾ The tightening torques apply for screws in the "dry" state as received on delivery and in the "lightly oiled" state for installation.

²⁾ In the "lightly oiled" state, the M_V is reduced to 10 Nm for M10 x 1 and 17 Nm for M12 x 1.5.

YEOSHE HYDRAULICS CO.,LTD

No.68 Wukong 1st Rd, Wufong Dist 413,Taichung Taiwan

Tel : +886-4-23332339

E-mail : yeoshe@ms36.hinet.net

Fax : +886-4-23333817

Website : www.yeoshe.com.tw

Dongguan branch

Cell phone : +86-10600266957

Tel : +86-769-85962158

E-mail : CNA523@yeoshe.com.cn

Fax : +86-769-81635359

Website : www.yeoshe.com.cn

YEOSHE BEST CHOICE
Innovative Technology

Efficient Performance
Reliable Quality and Service



YEOSHE



YEOSHE

油聖液壓科技有限公司

YEOSHE HYDRAULICS TECHNOLOGY CO.,LTD.

413 台灣台中市霧峰區霧工一路68號

No.68, Wugong 1st Rd., Wufong Dist., Taichung City, Taiwan, 413

TEL +886-4-23332339 **FAX** +886-4-23333817 **E-mail** yeoshe@yeoshe.com.tw

東莞辦事處 Dongguan

CP +86-13600266957 (Miss Zhong)

E-mail yeoshe@yeoshe.com.tw

上海辦事處 Shanghai

CP +86-15021931394 (Mr. Wu)

CP +86-18939716986 (Mr. Chen)

經銷商 Distributor



www.yeoshehydraulic.com

版權所有 翻印必究
Copyright ©2025 by YEOSHE